


BOX 1 - Measure Truck Frame


Take measurement from the closet point behind the cab your skid can set to the back of the frame.*

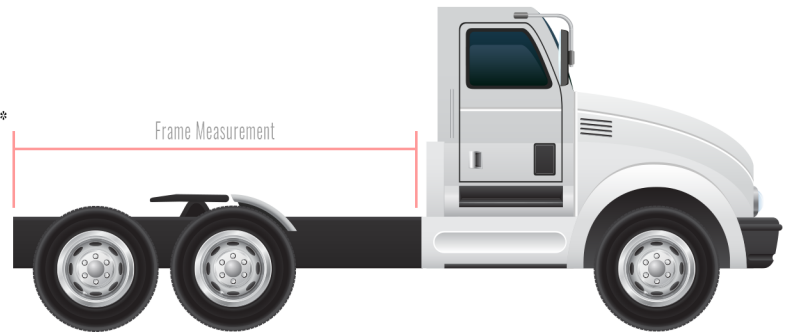

Frame Length

BOX 2 - Measure To Center Of Fifth Wheel

Take measurement from the closet point behind the cab your skid can set to the center of the fifth wheel.*

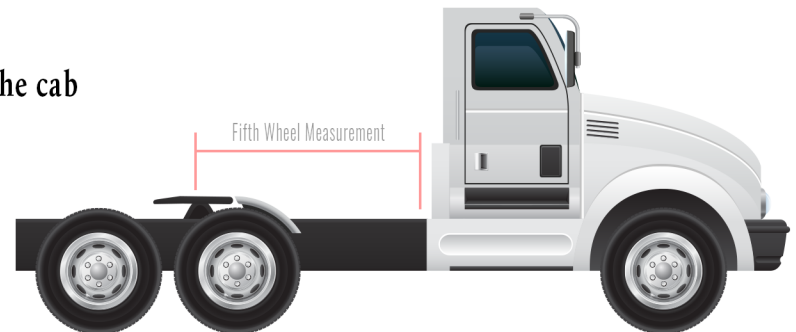


Fifth Wheel Measurement

*If fifth wheel is adjustable, enter value here: _____

BOX 3 - Measure Height Of Fifth Wheel

Take measurement from top of frame to top of fifth wheel.

Measure from the ACTUAL truck frame and not from the plate the fifth wheel sits on.

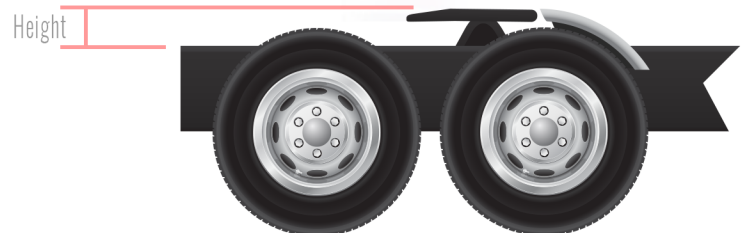

Height Measurement

BOX 4 - Measure Frame Width (Outside to Outside)

Take measurement in front of fifth wheel and behind fifth wheel.



Measurement - Behind Fifth Wheel

Measurement - In Front Of Fifth Wheel

INSTRUCTIONS: Please fill form out completely, selecting only one option per category. Other options are available; contact Bestway Ag for more information.

SECTION 1: TRUCK SKID☐ 18' (Standard)**SECTION 2: TANKS**

All tanks include bands. Available in either blue or black.

☐ 1635 Elliptical Leg Tank☐ 2035 Elliptical Leg Tank☐ 2650 Elliptical Leg Tank

Color Selection:

☐
Blue☐
Black**SECTION 3: MIX & FILL UNITS**☐ 35 Gallon Deluxe Mix & Fill Tank & Stand☐ 60 Gallon Deluxe Mix & Fill Tank & Stand☐ 7 Gallon Clean Load System With Stand**SECTION 4: PUMPS**☐ 6.5 HP B&S W/2" Pacer Poly Pump☐ 5.5 HP Honda W/2" Pacer Poly Pump☐ 5.5 HP Honda W/2" Pacer Cast Iron Pump☐ 5.5 HP Honda W/2" John Blue Self-Priming Cast Iron Pump☐☐ 13 HP Electric Start Honda W/3" John Blue Self-Priming Cast Iron Pump**SECTION 5: PLUMBING**☐ 2" Plumbing Kit☐ 3" Plumbing Kit**CUSTOMER NAME:** _____**DATE:** _____**SIGNATURE:** _____